

Stanilite PREMIUM

Flood Emergency

PRODUCT RANGE

- Premium Emergency Flood Luminaire
- 12W, 20W & 35W Lamp Head Options
- Standard or Computer Monitored Options

Stanilite Premium Emergency Flood Units provide a versatile Non-maintained emergency light source for many Commercial and Industrial applications. Stanilite Flood Units are especially useful where coverage is required for large open areas or for where ceiling mounted units are difficult to install and/or service.

Premium Flood units use sturdy White powder coated zinc steel enclosures with either Nickel-plated Steel (12W & 35W) tungsten halogen sealed beam or Moulded polycarbonate (20W) tungsten halogen bulb Lampheads. All Lampheads are fully adjustable in azimuth and elevation to customise light coverage to suit onsite conditions. Optional 20W remote mounted flood heads are available for specialised installations.



20-Watt Remote mounted Head

Selected Flood Units are also available in Nexus computer monitored versions.


Surface mount electronics as well as 105 deg C rated electronic components give market leading service life and reliability. All Stanilite Premium Flood Units are tested to comply with AS/NZS 4051 EMC Standard and AS/NZS 2293 Evacuation Lighting Standard.




Made in Australia

Due to ongoing product development, specification changes may result


Photometric Information

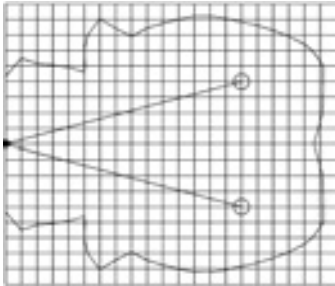


2 x 12W Flood Unit

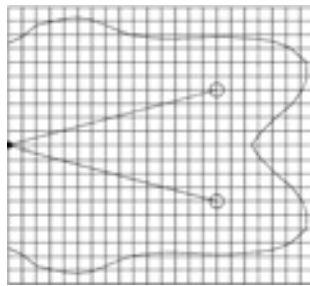

2 x 20W Flood Unit

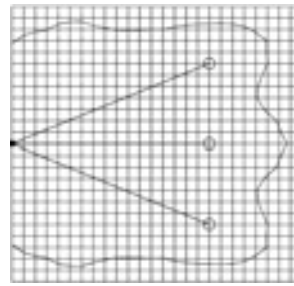

3 x 20W Flood Unit

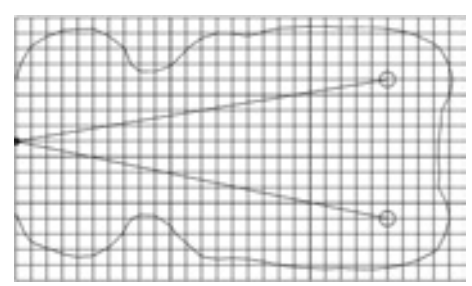

2 x 35W Flood Unit

Please note that Emergency flood units are classified as “in-direct lighting” under AS/NZS 2293-1998. The above photometric data applies for flood units mounted 3 metres, in height, and with lamp heads angled and aimed at the targets indicated. Scale of grid is 1m². Lampheads are to the left of each drawing; lamphead target(s) are indicated by a “O”.

Ordering Information

Part Number	Description
FL212	Stanilite Premium Flood Unit, Non maintained 2 x 12W
FLNXS212	Stanilite Premium Flood Unit, Non maintained 2 x 12W, Nexus Monitored
FL220	Stanilite Premium Flood Unit, Non maintained 2 x 20W
FLNXS220	Stanilite Premium Flood Unit, Non maintained 2 x 20W, Nexus Monitored
FL320	Stanilite Premium Flood Unit, Non maintained 3 x 20W
FL235	Stanilite Premium Flood Unit, Non maintained 2 x 35W
FLNXS235	Stanilite Premium Flood Unit, Non maintained 2 x 35W, Nexus Monitored
FLRH12V20W	Stanilite Premium 20W Remote Mount Flood head ONLY


Notes: The code NXS in any part number denotes Nexus Emergency Monitoring is provided. Weatherproof Versions are available for some of the above options upon application.

Electrical Specifications

Model	Voltage	Hz	Max Amps
Standard FL Unit	220/240 VAC	50	0.13A
Nexus monitored FL Unit	220/240 VAC	50	0.32A

Dimensions

Model	Weight Kg	Height H	Width W	Depth D	Total Height
FL 12W Units	8	348mm	322mm	90mm	483mm
FL 20 & 35 W Units	10	348mm	322mm	90mm	483mm

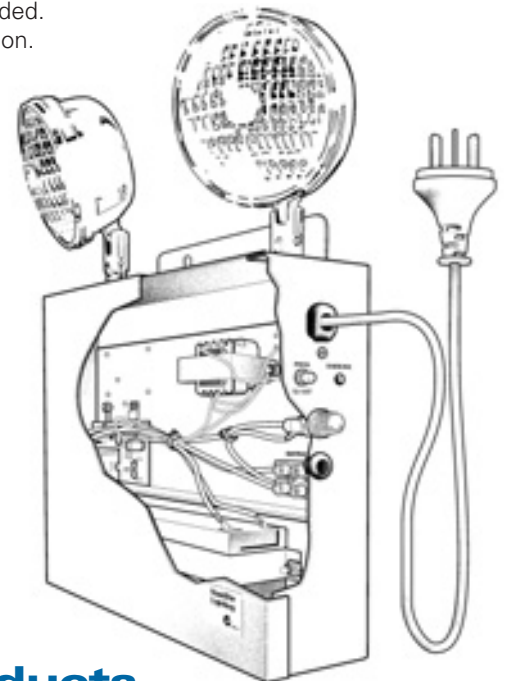

For more information on Stanilite Products

Phone 1300 666 595

Fax 1300 666 594

www.tnbaust.com

Thomas & Betts Australasia Pty Ltd
 Head Office 23a Nyrang St Lidcombe NSW 2141
 ABN 62 074 810 898

Thomas & Betts
Leading the Way