

# Stanilite PREMIUM


PRODUCT RANGE

## Spitfire™ Halogen Emergency



Made in Australia

- Premium Halogen Emergency Luminaire
- Standard or Computer Monitored Options
- Superior D20 Photometric Performance
- Hi Temperature NiMH Batteries
- Extensive Range of Lamp Head Options

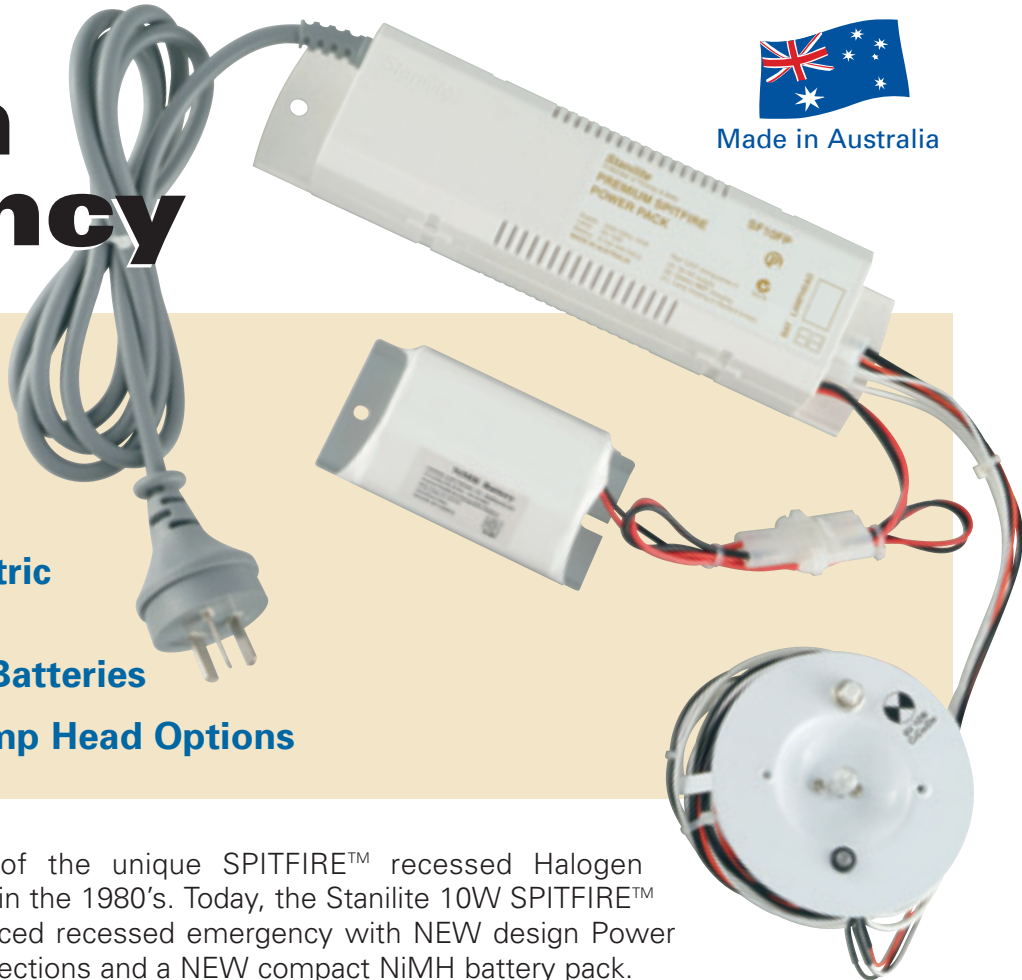

Stanilite introduced the concept of the unique SPITFIRE™ recessed Halogen emergency to the Australian market in the 1980's. Today, the Stanilite 10W SPITFIRE™ continues as Australia's most advanced recessed emergency with NEW design Power pack, NEW modular lamp head connections and a NEW compact NiMH battery pack.

The Stanilite Spitfire is now standard with a new technology Hi-Temp rated Nickel Metal Hydride (NiMH) battery pack providing a 2-Hour Discharge rating. The NiMH Battery pack is one third the length of conventional 5 D cell NiCad packs making installation in low profile ceilings a breeze! And the new lower profile polycarbonate (V094 flame retardant) "clamshell" style power pack comes complete with flex and plug as standard.

Stanilite Spitfire uses a 6V 10W premium Halogen lamp, providing a superior D20 emergency classification. It comes with a range of Lamp heads in 85mm or 141mm diameters, pre-cabled with a universal 6-way lamp head lead/connector assembly that simply snaps into the remote pack. Spitfire is also available with optional protective clear dome or IP65 Weatherproof lamp heads.

Surface mount electronics as well as 105 deg C rated electronic components give market leading service life and reliability. And special circuit design enables the Spitfire LED indicator to show whether a lamp is present and if the filament has failed. All Stanilite Spitfire fittings are tested to comply with AS/NZS 4051 EMC Standard and AS/NZS 2293 Evacuation Lighting Standard.

All Spitfire emergency fittings are available in either Standard (non-monitored) or Nexus (computer monitored) versions.

Due to ongoing product development, specification changes may result



Surface Mount Spitfire



White, Black or Stainless Steel Options



Wireguard & Clear Dome Options

### Ordering Information & Photometrics

Part No.	Description	Photometric Classification
SF10FP SFNXS10FP	10W SPITFIRE Recessed Emergency with 85mm dia head with Flex and plug	C0/C90 D20
SF10FPLH SFNXS10FPLH	10W SPITFIRE Recessed Emergency with 141mm dia head with Flex and plug	C0/C90 D20
SFB10 SFBNXS10	10W SPITFIRE Surface mounted Emergency	C0/C90 D20



Weatherproof Head Option

**Notes:** Stanilite 10W Spitfire is ordered complete in one box with the head option of your choice. Add

- CD to product code for clear dome head option (small or large head)
- NXS in any part number denotes Nexus Emergency Monitoring option
- R to product code for Round Earth pin option
- SS to product code for Stainless Steel head option (small head only)
- WG to product code for wireguard head option (small head only)
- WPH to product code for weatherproof head option (small head only)

### Luminaire Spacings

Classification	Mounting Height in Metres							
	2.1	2.4	2.7	3	3.6	4	5	6
D20	13.1	13.6	14.1	14.5	15.1	15.5	16.1	16.4

### Technical Specifications

Part No	240 VAC Power	Weight	Size	Material
SF**10FP	8W	2Kg	85mm diameter Head 70mm dia cut-out	ABS body, Powder coated Zinc Steel head
SF**10FPLH	8W	2Kg	141mm diameter Head 130mm dia cut-out	ABS body, Powder coated Zinc Steel head
SFB**10	8W	3 Kg	285(W) x 50(H) x 165 (D)	Powder Coated Zinc Steel

### For more information on Stanilite Products

Phone 1300 666 595

Fax 1300 666 594

www.tnbaust.com

Thomas & Betts Australasia Pty Ltd  
Head Office 23a Nyrang St Lidcombe NSW 2141  
ABN 62 074 810 898

**Thomas & Betts**  
Leading the Way