


SF07FP

- Easy to install
- Small and discreet
- Cost effective solution
- Supplied with flex and plug as standard



Features

- The New Performance Solafire Emergency Luminaire provides a cost effective solution for emergency lighting applications with Spitfire[®] quality at a competitive price.
- The Performance Solafire recessed unit comes standard with a small 85mm lamp head, remote control gear and Ni-Cad batteries, with a variety of lamp head options available.
- The powerful halogen lamp provides a D12.5 emergency classification.
- The Performance Solafire includes a Filament Continuity Circuit that monitors whether the lamp is present and if the filament has failed. This is indicated simply by means of the LED indicator, if the LED is off then there is a problem with the lamp.
- For ease of installation, the Performance Solafire comes with mains flex and plug and fully assembled lamp head that plugs into the remote control unit.
- Manufactured using high quality surface mount and through hole components.

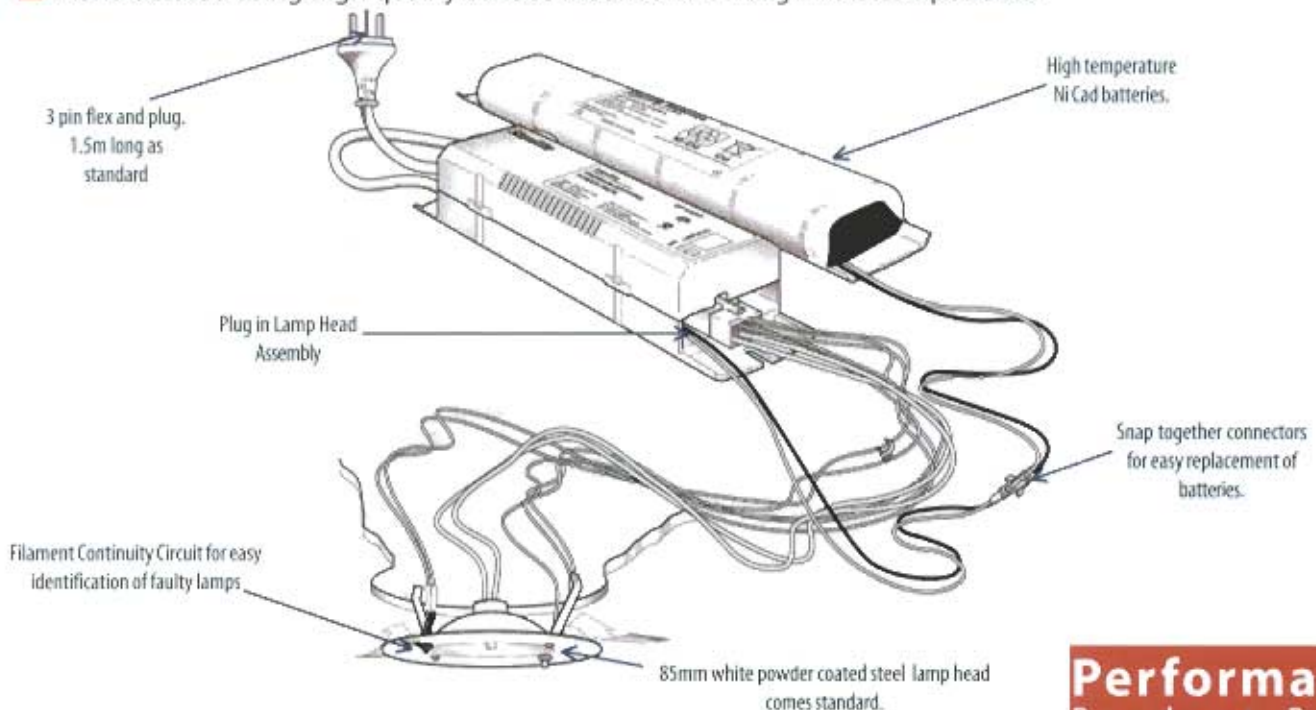

Performance!
Product Range

TECHNICAL INFORMATION

Due to ongoing product improvement, specification changes may result.

Part No	Description	Photometric Classification										
SF07FP	7W Non Maintained Performance Solafire. C/W Flex and Plug	C0	D12.5									
		C90	D12.5									
Power Consumption												
240V AC 50HZ - .04A												
Construction												
Control Pack: Polycarbonate case enclosing electronics. Separate battery pack.												
Lamp Head: White powder coated, zinc seal steel												
Photometric Classification			Mounting Height (m)									
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0
D12.5			11.1	11.5	11.8	12.1	12.4	12.5	12.7	12.9	13.0	12.8

Stanilite emergency lighting products are tested to comply with EMC Standard AS/NZS 4051 and Australian Standard AS/NZS 2293.

Dimensions

Lamp Head	Size	Cutout		
Small	85mm	70mm		
Large	141mm	130mm		
		L	W	H
Control Pack	225mm	56mm	44mm	
Battery Pack	280mm	46mm	25mm	
Surface Mount	285mm	165mm	50mm	

Options and Accessories

Part No	Description
SF07FPCD	7W N/M Solafire with Clear Dome
SF07FPLH	7W N/M Solafire with Large Head
SFB07	7W N/M Solafire Surface Mount
02-SHWP12V	Weatherproof Enclosures
02-SFLHCD	Large Head with Clear Dome
21-00830	Wireguard for Small Head
15-00803	Lamp 12V 7W Tungsten Halogen
03-01206	Ni-Cad Battery Pack 10 Sub C



Powder-coated Spinnings. Also available in Stainless Steel. (Will effect photometric performance)



Wireguard or Acrylic Domes available.



Small and Large Spinnings



IP65 weatherproof enclosure

National Support Centre

Tel: 1300 666 595 Fax: 1300 666 594

Head Office & Manufacturing

23a Nyrang Street, Lidcombe NSW 2141 Australia Tel: +612 9749 8444 Fax: +612 9749 8445

Sydney +612 9749 8400 Melbourne +613 8558 8100 Brisbane +617 3891 7666 Adelaide +618 8292 4555 Perth +618 9445 8804 Tasmania +613 6331 5545 NZ +647 849 9119