



The Stanilite® Economy 10W Exit bodies and diffusers are sold separately with wall mount, single sided or double sided ceiling diffuser options.

Features

- Large 16mm² terminal block for easy wiring
- Simple plug in lead for easy installation
- Strong, light weight & fire retardant ABS body
- Two mounting options

Economy 10W Exit Bodies

Part No.	Description
EE110M	Economy 1 x 10W Maintained Body
EE110N	Economy 1 x 10W Non Maintained Body
EE210S	Economy 2 x 10W Sustained Body
EEAC110	Economy 240V AC 1 x 10W Body
EEDC210S	Economy 110V DC 2 x 10W Body
EENXS110M	Economy Nexus 1 x 10W Maintained Body

Diffusers with Pictograph Inserts to Suit Economy 10W Exits

31-PEWM	Wall Mount Diffuser includes all Pictograph inserts
31-PECMS	Ceiling Mount Single Sided Diffuser includes all Pictograph inserts
31-PECMD	Ceiling Mount Double Sided Diffuser includes all Pictograph inserts

Note The above Economy diffusers include all Pictograph insert options.

Exit Inserts

Economy 10W Pictograph Diffusers are supplied with all Pictograph insert options. For EXIT Insert Peel off Arrow, see below table:

29-E1-10	Exit Insert Peel off Arrow 10 Pack
----------	------------------------------------

Diffusers with Exit and Peel off Arrows

31-EWM	Wall Mount Diffuser EXIT with Peel off Arrows
31-ECMS	Ceiling Mount Single Sided Diffuser EXIT with Peel off Arrows
31-ECMD	Ceiling Mount Double Sided Diffuser EXIT with Peel off Arrows
31-ECM4W	Ceiling Mount 4 Way Diffuser EXIT with Peel off Arrows

Technical Specifications

Photometric & Luminaires Spacings												
Product	Classification		Mounting Height in Metres									
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0
31-PEWM, 31-EWM Wall Mount	C0	E1.25	4.2	4.2	4.0	3.6	4.0	3.0				
	C90	E1.0	3.8	3.6	3.2	3.6						
31-PECMS, 31-ECMS Ceiling Mount SS	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6	
	C90	E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	5.8	
31-PECMD, 31-ECMD Ceiling Mount DS	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6	
	C90	E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	5.8	

Note Under AS2293.1-2005, exit signs shall be mounted not less than 2m and not more than 2.7m above floor level, or immediately above the doorway if the doorway is higher than 2.7m. However, variations to these heights shall be allowed when specifically agreed by the relevant regulatory authority.

Power Consumption


240V AC 50HZ

- 10W Economy Exit 15W

Construction

- Body Moulded ABS
- Diffuser Moulded Acrylic

Dimensions

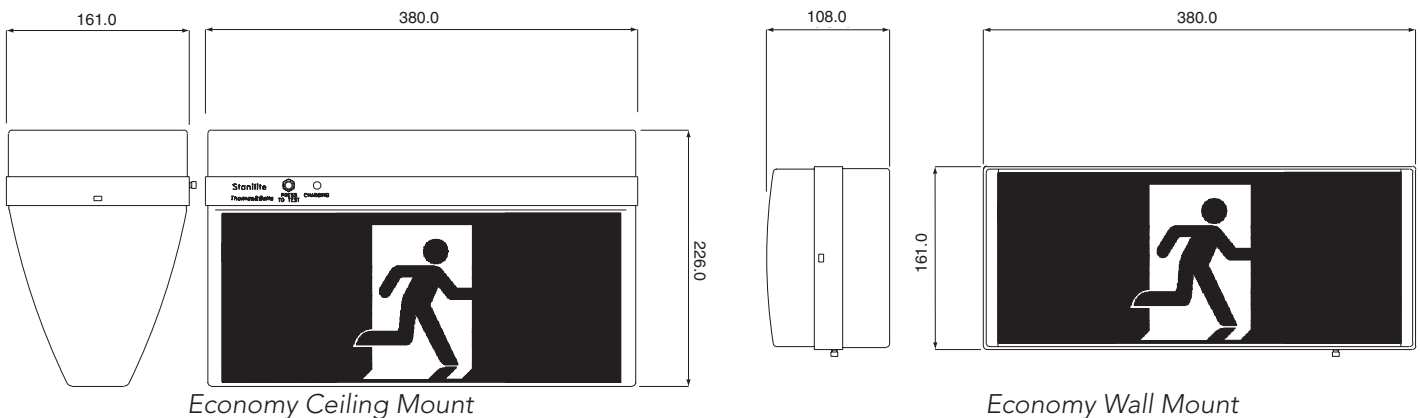

Parts & Accessories

Part No.	Description
Diffusers	
31-PEWM-B	Economy Pictograph Exit wall mount diffuser – no insert
31-PECM-B	Economy Pictograph Exit ceiling mount single sided diffuser – no insert
Wire Guards	
EEWGCM	Wire guard ceiling mount to suit 10W Economy Exit
EEGWGM	Wire guard wall mount to suit 10W Economy Exit
Lamps	
15-00215	Lamp to suit 10W Economy Exit
Batteries	
03-01204	Battery 3 cell sub C to suit Economy Exit

Thomas & Betts emergency lighting products are tested to comply with AS2293 and meet relevant Australian EMC Standards. Due to ongoing product development, specification changes may result.